

25G SFP28

Passive Direct Attach Cable



Volex SFP28 Passive Copper Direct Attach Cable features one transmitting and one receiving 25Gbps NRZ channels and meets IEEE 802.3 by 25G Ethernet standard. The Volex SFP28 passive DAC enhances Signal Integrity severely stressed at high-speed data rates.

This next generation product shares the same mating interface with SFP+ form factors, making it backward compatible with existing SFP+ ports. It is also designed to accommodate standard and ganged connector configurations in demanding high density requirements.

SFP28 can be used with current 10G and 16G applications with substantial signal integrity margin.



Near zero power consumption and no heat generated



Complete cable assembly uniquely terminated at the factory to provide the most reliable operation



100% tested for signal integrity with serial number traceability


FEATURES AND SPECIFICATIONS

Product Type	SFP28 to SFP28 Passive Copper Cable Assembly
Conductor Treatment	Laser stripped conductors
Cable Type	High-speed twinax cable, 2-pair differential, 100 +/-5 ohms
Cable Colour	Black
Cable Jacket	PVC
Packaging	PE bag
Power Supply Voltage	3.3 V
Temperature Range	0 - 70°C
Retention Force	Maximum 170N per SFF 8432 Minimum 90N per SFF 8432
Insertion Force	Maximum 18N per SFF 8432
EEPROM	Each connector module contains an EEPROM to provide product information to the host system
Cable Termination	100% factory tested including comprehensive signal integrity verification and serial number traceability using advanced Manufacturing Execution Systems

Volex reserves the right to change specifications and availability without prior notice.

Applications	Standards Compliance
<ul style="list-style-type: none"> Switches, Servers, Routers, Storage Arrays Networking Equipment Data Centers Storage Area Networks Telecommunication Central Offices Test and Measurement Equipment 	<ul style="list-style-type: none"> IEEE P802.3by SFF-8402, SFF-8432, SFF-8472 EIA 364 UL 94, 1581, VW1, File No. E510564 RoHS

Mechanical Drawing

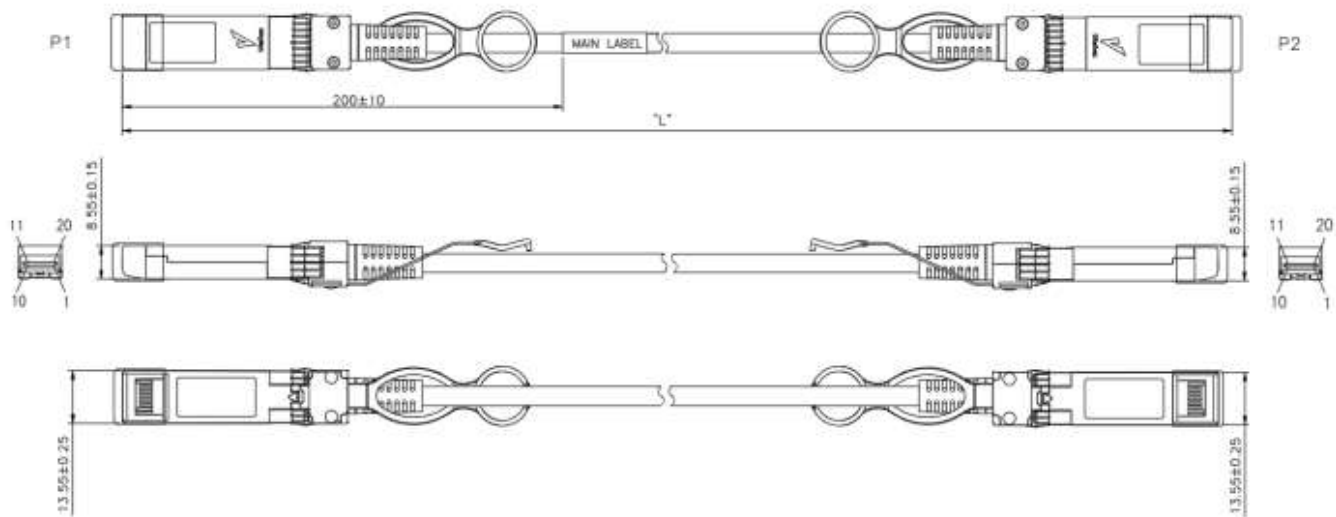

Volex P/N	Cable Length (m)	Cable Gauge (AWG)	Cable OD (mm)
DS40PSG05BS	0.50	30	4.5
DS40PSG10BS	1.00	30	4.5
DS40PSG20BS	2.00	30	4.5
DS40PSG25BS	2.50	30	4.5
DS40PSG30BS	3.00	30	4.5
DS48PSG40BS	4.00	28	5.5
DS46PSG50BS	5.00	26	6.0

0.5 - 5.0m lengths available with 26 - 30 AWG conductor sizes to achieve maximum performance.

Options Available

- Low Smoke, Zero Halogen (LSZH) Jackets
- Custom colours for pull tab
- Custom EEPROM mapping

Volex Worldwide CONTACT INFO		
Americas Tel: +1 501 438 1313		EMEA Tel: +44 7768 924844
China Tel: +86 159 5019 6906	Asia Pacific Tel: +65 6904 1545	India Tel: +91 99406 10637

Contact us at sales@volex.com for assistance in finding the right solution for your needs.